

drape



okamura

Simple and functional.
A minimalist pod for open offices.



Drape is a minimal-sized pod with sound-absorbing capability. It takes up as little as four carpet tiles to build and transform open offices into a hub of concentration. The outer side of the two-toned panels are colored with brighter hues to uplift the office, while the inside panels are covered with a calming gray tone.

Award




The perfect get-away space

The highly effective sound-absorbing panels reduce noise in open offices, giving you a quiet environment you need to focus on your task. The panels also prevent inside sounds from leaking.




Distraction-blocking panels to enhance workers' focus

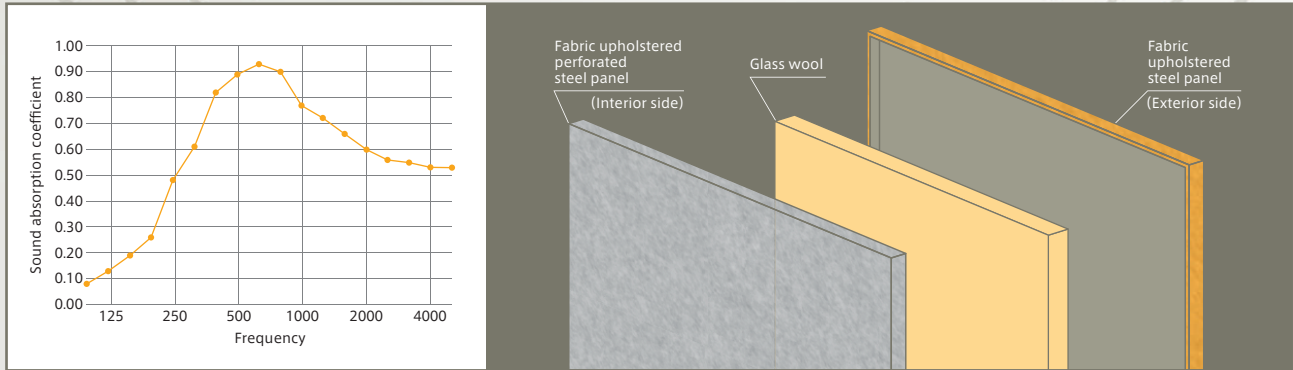

The slim profile panels are only 1 3/16" thick. The core of these panels have glass wool insulation for excellent sound absorption. The clean and straightforward design creates mini-environments for focus throughout the office while also adding aesthetic interest points and color to the workplace.

Performance	
Acoustics :	NRC Value - 0.70 *Noise Reduction Coefficient SAA Value - 0.68 *Sound Absorption Average Note: Results are of the Felt applied panel. Value varies according to cover fabric. The measurement results comprise materials evaluations for panel units, and do not guarantee actual sound absorption effects.
Fire test :	ASTM E84 - Class A Note: Results are of the Felt applied panel and Interlock applied panel.

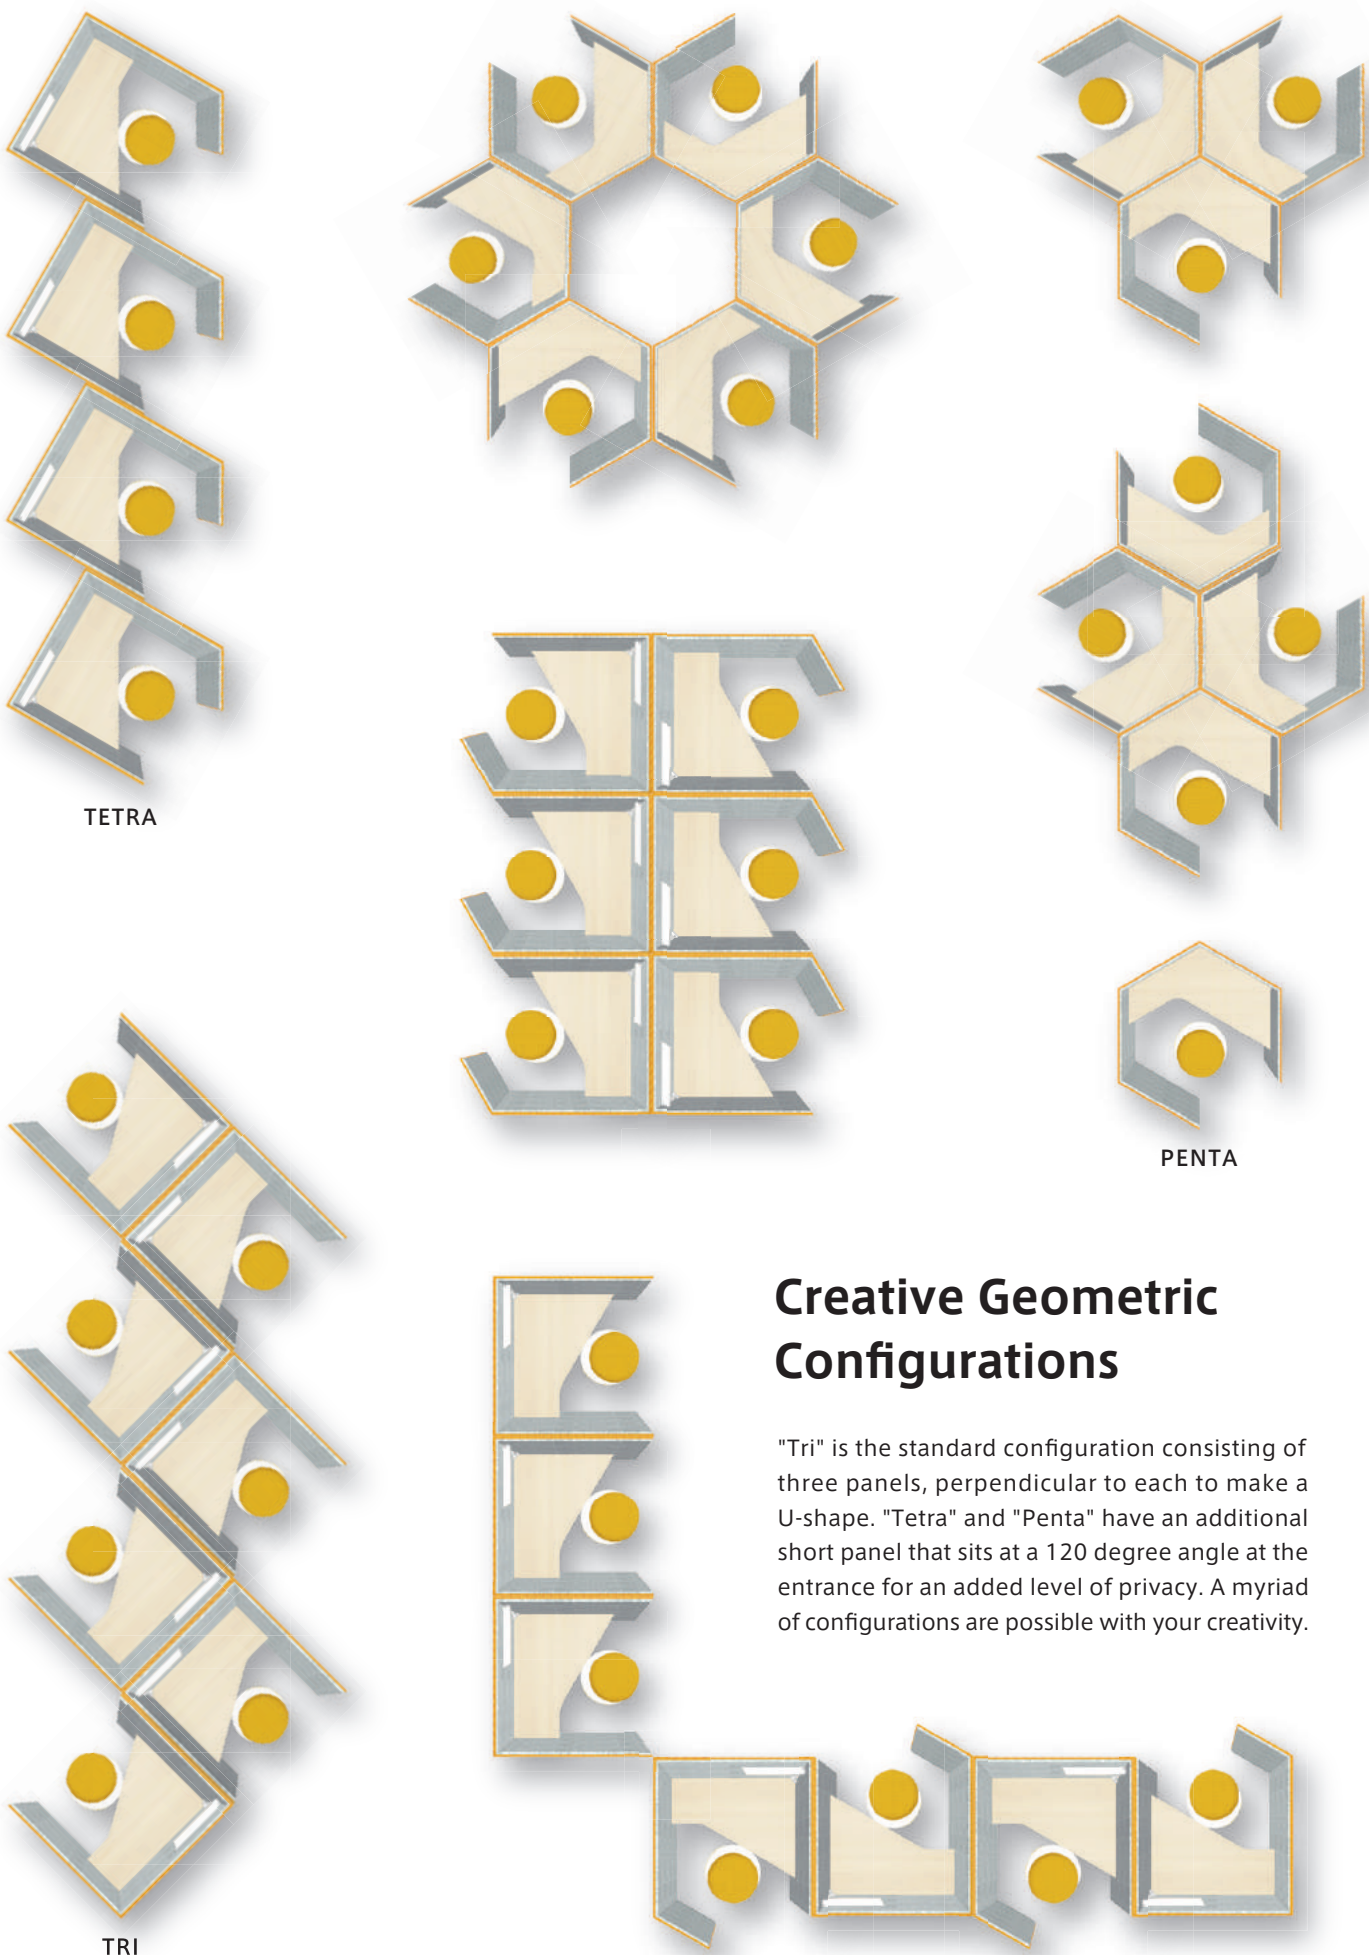

TETRA


PENTA

TRI

Creative Geometric Configurations

"Tri" is the standard configuration consisting of three panels, perpendicular to each to make a U-shape. "Tetra" and "Penta" have an additional short panel that sits at a 120 degree angle at the entrance for an added level of privacy. A myriad of configurations are possible with your creativity.

Function

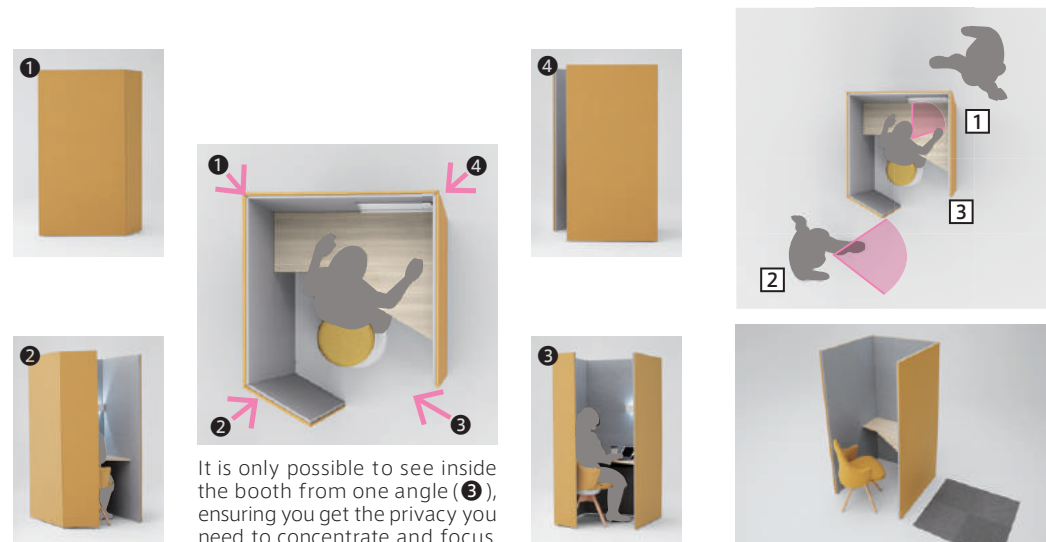





















It is only possible to see inside the booth from one angle (3), ensuring you get the privacy you need to concentrate and focus.

The Tri requires less than 40" x 40" of floor space, a footprint similar to four carpet tiles.

- 1 When inside the booth, the user sits facing the inside corner, cutting visual interference from outside. The diagonally cut tabletop also secures ample workspace and legroom.
 - 2 Tetra's small panel behind the user prevents others from looking inside, giving the user a feeling of security.
- 
- The image shows a close-up of the Tetra booth's slim profile panel. It features a 60-degree angled cut on the edge profile, creating a sharp visual effect. The panel is shown in a light gray color, with a yellowish-gold trim piece visible at the top edge.

Line Up

			Tabletop H 28 3/8"				Tabletop H 39 3/8"					
			Tri		Tetra		Tri		Tetra		Penta	
												
Panel	Panel Height Tabletop Height											
	Tabletop Orientation		Right 	Left 	Right 	Left 	Right 	Left 	Right 	Left 	Right 	Left 
	Code	59 13/16"H	4WA11CN		4WA12CN	4WA12DN	—	—	—	—	—	—
		75 9/16"H	4WA11EN		4WA12EN	4WA12FN	4WA11EN		4WA12EN	4WA12FN	4WA13EN	
Tabletop - Code			4WA21AN	4WA21BN	4WA21AN	4WA21BN	4WA21AN	4WA21BN	4WA21AN	4WA21BN	4WA23AN	4WA23BN

The code for the left type and right type of Tri and Penta is the same. Variation with 75 9/16" high panels would need lighting on the desk or from the ceiling. We recommend using a non-swivel chair for Tetra and Penta.

<Common specifications>Panel : Sheet metal with levelers, Surface : Fabric or Felt, Sound absorbent material : Glass-wool, Tabletop : Laminated work surface, Wire management tray : Powder coated steel

Colors

■ Panel (Combination)

Felt (Two-tone)



The inside fabric comes with gray or beige, and the outer side is available with 18 beautiful contrasting colors. A single color fabric option is also available upon request.

■ Tabletop (Combination)

<div> <div>Tabletop Edge</div> <div>Bracket/Foot</div> </div>	MG99	MX61*	MX62*	MX63*
	Tabletop : MG07 (White) Edge : G939 (White)	Tabletop : MX51(Prize Wood Light) Edge : GE21 (Prize Wood Light)	Tabletop : MX52(Prize Wood Medium) Edge : GE22(Prize Wood Medium)	Tabletop : MX53(Prize Wood Dark) Edge : GE23(Prize Wood Dark)
	MHE6	MHV3	MHV4	MHV5
ZK25 (Black)				



*Anti - fingerprint laminate surface provides resistance to fingerprints and easily wipes clean.



Options

■ Power Accessory



A power unit can be attached underneath the tabletop at your preferred location.


Configuration		Color	Code
	2 Power 1 Dual USB charger w/72" 90 degree plug cord	Black	MMD3BA-Y708
		White	MMD3BA-Y707
	3 Power w/72" 90 degree plug cord	Black	MMD3BB-Y708
		White	MMD3BB-Y707

Configuration		Color	Code
	2 10W USB A Ports w/72" power supply cord with a barrel connector	Black	MMD2CA -Y708
		White	MMD2CA -Y707
	10W USB A Port 15W USB C Port w/72" power supply cord with a barrel connector.	Black	MMD2CB -Y708
		White	MMD2CB -Y707

There is a 1/2" gap between the bottom of the panel and the floor allowing enough room for a cable to pass through.

*For North American Market Only

■ Wall Light

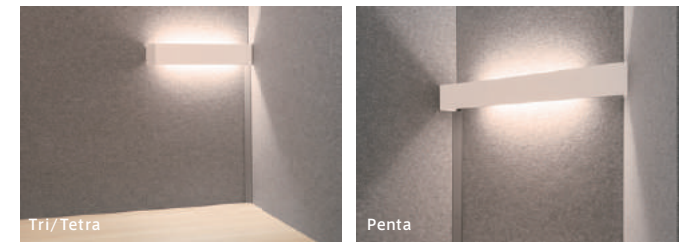

The optional lighting is soft on the eyes yet strong enough to aid your work. The wall light is available with downlight only or with both uplight and downlight.

ZA75 (Neo White), ZK25 (Black)		
Lighting Fixture	Uplight & Downlight kit (Daisy-chained)	4WAZYYN -Y647
	Downlight kit (Stand-alone)	4WAZZYN -Y647
Bracket	For Tri/Tetra	4WA91AN -ZA75, ZK25
	For Penta	4WA91CN -ZA75, ZK25


* Please prepare a power outlet below the tabletop.

* For North American Market Only

<Common specifications> Bracket : Powder coated steel, Vertical wiring duct : Powder coated steel

<Light specifications>Power consumption : 5.0W(Stand-alone)9.4W(Daisy-chained)
Color temperature : 3500K Color rendering index : 85 Switch : Capacitive touch sensor
(Master control for Daisy-chained kit)Brightness adjustability : 100% - 15% continuous;
w/last state memory (when powered) Automatic turn off : after 12 hours (±15 mins).
Certifications : ETL listed (UL153 & CSA C22.2 No.250.4, FCC Part 15 Class B, CEC Title20)

■ Vertical Wiring Duct

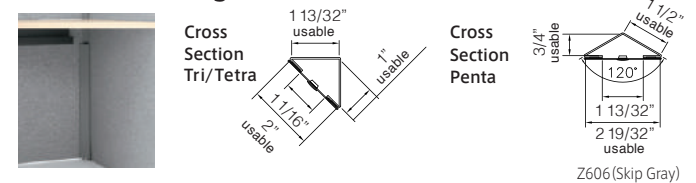


06 (Skip Gray)



For Tri/Tetra	28 3/8" H	4WAY1YN-Z606
	39 3/8" H	4WAY2YN-Z606
For Penta	39 3/8" H	4WAY3YN-Z606

<Common specifications> Vertical wiring duct : Powder coated steel


Measurements

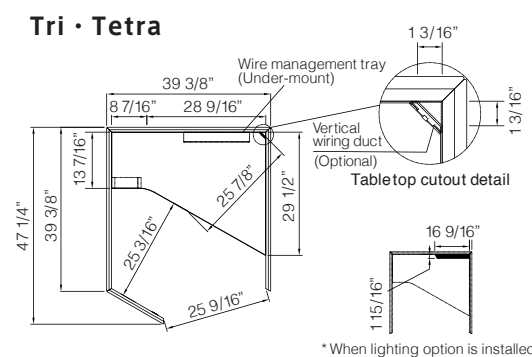

* When lighting option is installed

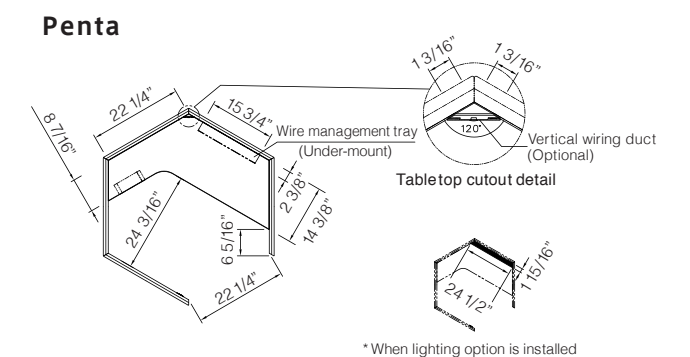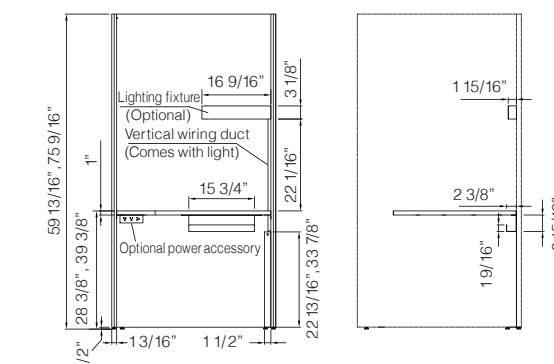

* When lighting option is installed

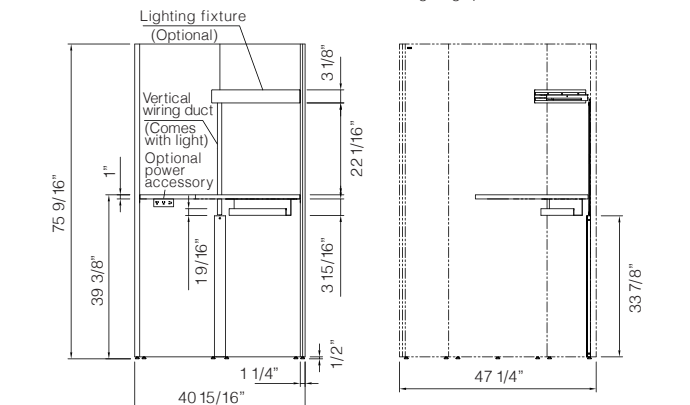

okamura